



【XP 电动托盘搬运车】
XP Electric Pallet Truck

ISO 9001 CE




- 立式驱动系统
Vertical driven wheels
- 进口他励电控
Imported separately excited electric control
- 再生制动功能
Regenerative braking function
- 德国Frei原装手柄
Frei tiller ,original device of Germany
- 蓄电池侧位装卸
Sideways battery exit
- 可选用进口交流电控
Optional imported AC electronic controller


Zowell 卓一™

XP电动搬运车技术参数
XP Electric Pallet Truck Technical Data

特性 Identification	1	产品型号	Product model designation		XP20	XP25
	2	驱动形式	Drive unit		电动	Electric
	3	驾驶方式	Operator type		站驾式 / 步行式	Standing / Pedestrian
	4	额定载荷	Load capacity	Q kg	2000	2500
	5	载荷中心	Load center	C mm	600	600
	6	后悬距	Load distance,centre of drive axle to fork back	X mm	182	182
	7	轴距	Wheelbase	Y mm	1426	1426
重量 Weight	1	自重(不含电池)	Truck Weight(without battery)	kg	365	380
	2	桥荷满载(前/后)	Axle loading, loaded(front/rear)	kg	965/1595	1154/1915
	3	桥荷空载(前/后)	Axle loading, unloaded(front/rear)	kg	434/126	445/129
轮子 Wheel	1	轮胎	Tyres	mm	聚氨酯轮 Polyurethane	聚氨酯轮 Polyurethane
	2	驱动轮尺寸	Driven wheels size	mm	Φ 230×75	Φ 230×75
	3	承载轮尺寸	Loaded wheels size	mm	Φ 80×70	Φ 80×70
	4	平衡轮尺寸	Balance wheels size		Φ 100×40	Φ 100×40
	5	轮子数量(前/后)(x=驱动轮)	Wheels number, front/rear (x=driven wheel)		1x-2/4	1x-2/4
	6	前轮距	Tread,front	mm	510	510
	7	后轮距	Tread,rear	mm	400	400
基本尺寸 Dimensions	1	总高(货叉最低时)	Height,mast lowered	h1 mm	1280	1280
	2	起升高度	Lift height	h3 mm	205	205
	3	货叉离地高度(最低时)	Forks height,lowered	h5 mm	85	85
	4	操作手柄离地高度(最大/最小)	Height of tiller in drive position(max/min)	h6 mm	1200/985	1200/985
	5	总长	Overall length	L1 mm	1770	1770
	6	货叉前端面至前部距离	Length to face of forks	L2 mm	620	620
	7	总宽	Overall width	b1 mm	725	725
	8	货叉尺寸	Fork dimensions	s/e/l mm	160/55/1150	160/55/1150
	9	货叉外宽	Maximum forks width	b3 mm	520/560/680	
	10	最小离地间隙	Minimum ground clearance	m mm	30	30
	11	直角堆垛通道宽度, 托盘800X1200 (1200沿货叉边) Aisle width for pallets 800X1200 lengthways		Ast mm	2047	
	12	转弯半径	Turning radius	Wa mm	1615	
性能 Performance	1	行驶速度 满载/空载	Travel speed Loaded/unloaded	km/h	5.2/6	4.8/5.6
	2	提升速度 满载/空载	Lift speed Loaded/unloaded	mm/s	40/50	
	3	下降速度 满载/空载	Lowering speed Loaded/unloaded	mm/s	50/40	
	4	最大爬坡能力 满载/空载	Max gradeability Loaded/unloaded	%	8/15	
	5	制动方式	Service brake		电磁制动 Electromagnetic brake	
电机 Electric Motor	1	驱动电机功率	Drive motor rating	kw	1.2	1.5
	2	提升电机功率	Lift motor rating	kw	0.8	
	3	蓄电池电压/容量	Battery voltage /capacity	V/Ah	24/210	
	4	蓄电池重量	Battery weight	kg	240	
其他 Others	1	控制方式	Control unit type		场效应管控制 MOSFET control	场效应管控制 MOSFET control
	2	整车噪音	Sound level	dB (A)	<70	<70

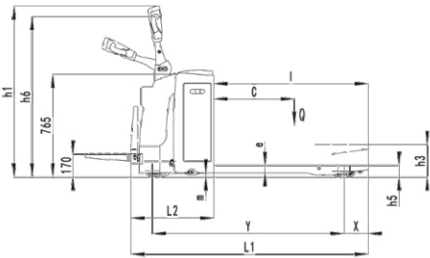

XP20外形图

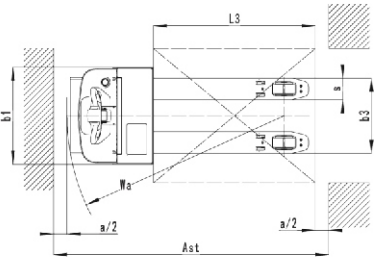

注: Ast=Wa+a+L3-l+X
a=200 L3=托盘长度