



【XR 电动前移式堆垛车】
XR Electric Reach Stacker

ISO 9001 CE



- 立式驱动系统
Vertical driven wheels
- 进口他励电控
Imported separately excited electric control
- 再生制动功能
Regenerative braking function
- 德国Frei原装手柄
Frei tiller, original device of Germany
- 蓄电池侧位装卸
Sideways battery exit
- 宽视野门架
Widen mast views
- 可选用进口交流电控
Optional imported AC electronic controller



XR电动前移式堆垛车技术参数



XR Electric Reach Stacker Technical Data



特 性 Identification	1	产品型号	Product model designation		XR10	XR12	XR15
	2	驱动形式	Drive unit		电动	Electric	
	3	驾驶方式	Operator type		站驾式	Standing	
	4	额定载荷	Load capacity	Q kg	1000	1200	1500
	5	载荷中心	Load center	C mm	500	500	500
	6	前悬距	Load distance, centre of drive axle to fork face	X mm	446	446	446
	7	轴距	Wheelbase	Y mm	1390	1390	1390
重 量 Weight	1	自重(不含电池)	Truck Weight(without battery)	kg	1520	1580	1700
	2	桥荷满载(前/后)	Axle loading, loaded(front/rear)	kg	1150/1820	1172/1858	1338/2112
	3	桥荷空载(前/后)	Axle loading, unloaded(front/rear)	kg	1245/524	1287/542	1372/578
轮 子 Wheel	1	轮胎	Tyres		聚胺酯轮		
	2	驱动轮尺寸	Driven wheels size	mm	230×75		
	3	承载轮尺寸	Loaded wheels size	mm	210×85		
	4	平衡轮尺寸	Balance wheels size	mm	125×60		
	5	轮子数量(前/后)(x=驱动轮)	Wheels number, front/rear(x=driven wheels)		1x-2/2		
	6	前轮距	Tread, front	mm	740		
	7	后轮距	Tread, rear	mm	985		
基 本 尺 寸 Dimensions	1	总高(货叉最低时)	Height, mast lowered	h1 mm	1780		
	2	自由提升高度	Free lift	h2 mm	90		
	3	起升高度	Lift height	h3 mm	2500		
	4	最大高度(货叉最高时)	Height, mast extended	h4 mm	3440		
	5	货叉离地高度(最低时)	Forks height, lowered	h5 mm	35		
	6	操作手柄离地高度(最大/最小)	Height of tiller in drive position(max/min)	h6 mm	1380/1020		
	7	总长	Overall length	L1 mm	2090		
	8	货叉前端面至前部距离	Length to face of forks	L2 mm	1185		
	9	总宽	Overall width	b1 mm	1090		
	10	货叉尺寸	Fork dimensions	s/e/l mm	100/35/1070		
	11	货叉外宽	Maximum forks width	b3 mm	200-720		
	12	前移距离	Reach length	L3 mm	580		
	13	最小离地间隙	Minimum ground clearance	m mm	55		
	14	直角堆垛通道宽度, 托盘1000X1200(1000沿货叉边)	Aisle width for pallets 1000X1200 lengthways	Ast mm	2410		
	15	直角堆垛通道宽度, 托盘800X1200(1200沿货叉边)	Aisle width for pallets 800X1200 lengthways	Ast mm	2610		
	16	转弯半径	Turning radius	Wa mm	1656		
	17	导轨间内宽	Inside width between the guides	b4 mm	780		
性 能 Performance	1	行驶速度满载/空载	Travel speed Loaded/unloaded	km/h	4.8/5.6	4.8/5.6	4.8/5.6
	2	提升速度满载/空载	Lift speed Loaded/unloaded	mm/s	90/120	100/120	90/120
	3	下降速度满载/空载	Lowering speed Loaded/unloaded	mm/s	125/80	130/80	125/80
	4	最大爬坡能力满载/空载	Max gradeability Loaded/unloaded	%	5/8		
	5	制动方式	Service brake		电磁制动		
电 机 Electric Motor	1	驱动电机功率	Drive motor rating	kw	1.2		
	2	提升电机功率	Lift motor rating	kw	2.2/3.0		
	3	蓄电池电压/容量	Battery voltage /capacity	V/Ah	24/240		
	4	蓄电池重量	Battery weight	kg	250		
其 他 Others	1	控制方式	Control unit type		场效应管控制		
	2	整车噪音	Sound level	dB (A)	<70		

高度参数 Height Data

1	总高	Overall height	h1 mm	2030	2230	1780	2030	2180	2380	2350	1960	2060	2160	2230	2300
2	自由提升高度	Free Lift	h2 mm	1000	1200	90	90	90	90	90	1400	1500	1600	1660	1720
3	起升高度	Lift Height	h3 mm	1600	1800	2500	3000	3300	3700	4000	4200	4500	4800	5000	5200
4	最大高度	Maximum height	h4 mm	2540	2740	3440	3940	4240	4640	4940	5040	5340	5640	5840	6040

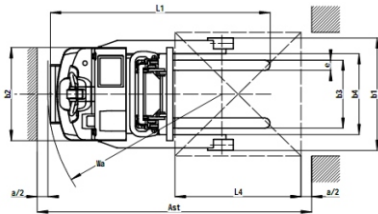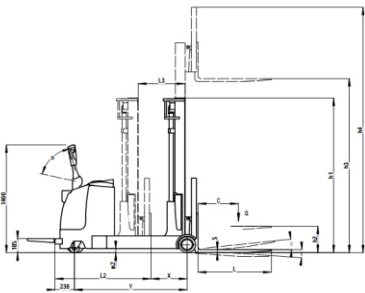

www.zowell.com.cn